


Fig. 114 Wafer & Lug type

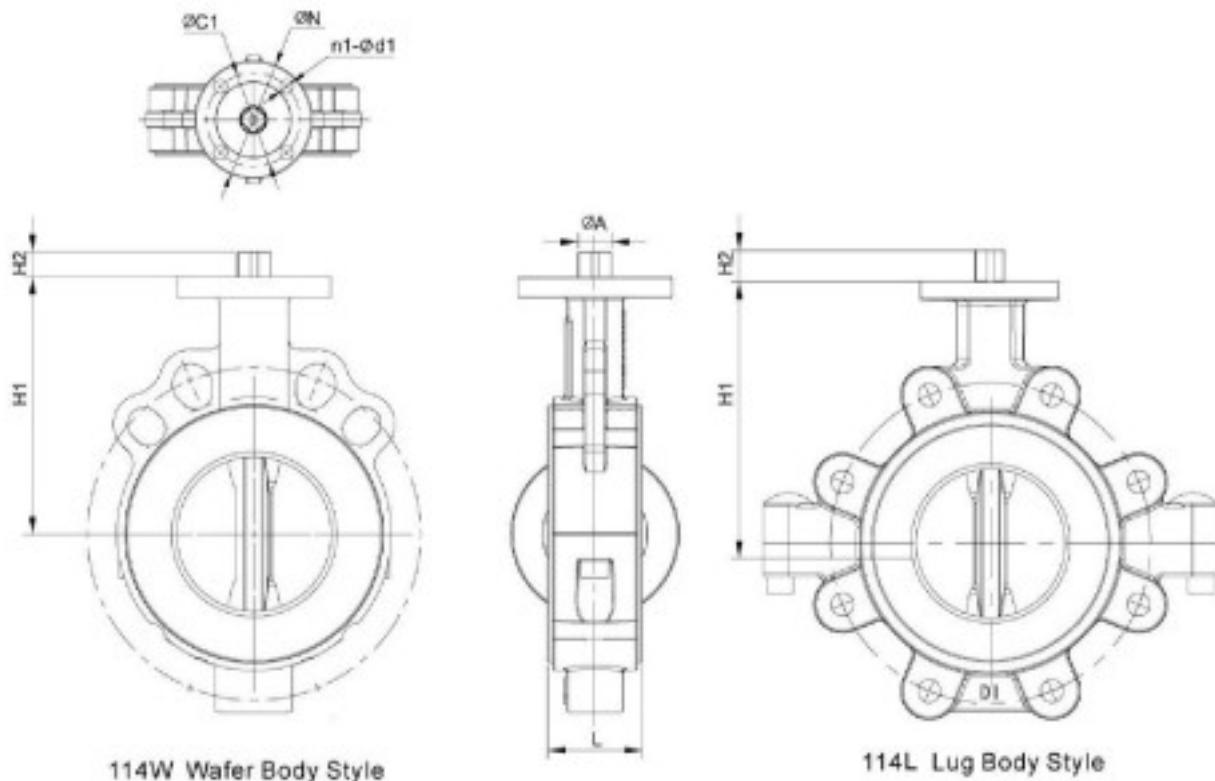

114W Wafer Body Style

114L Lug Body Style

SIZE		L	H1		H2	$\varnothing A$	ISO 5211	$\varnothing N$	$n_1 \cdot \varnothing d_1$
INCH	DN		Wafer	Lug					
1-1/2	40	33	100	100	14.5	9	F05	65	4-8
2	50	43	110	110	14.5	11	F05	65	4-8
2-1/2	65	46	125	125	14.5	11	F05	65	4-8
3	80	46	132	136	14.5	11	F05	65	4-8
4	100	52	147	151	20	14	F07	90	4-10
5	125	56	170	170	22	17	F07	90	4-10
6	150	56	190	190	22	17	F07	90	4-10
8	200	60	222	222	28	19/22	F07/F10	125	4-10/4-12
10	250	68	270	270	28	22	F10	125	4-12
12	300	78	290	290	28	22	F10/F12	150	4-12/4-14
14	350	78	325	325	35	27	F12	150	4-14
16	400	102	342	342	45	36	F14	175	4-18

Valve Torque

(All torques in N-m.)

VALVE SIZE	DN	40	50	65	80	100	125	150	200	250	300	350	400
VALVE SIZE	INCH	1-1/2	2	2-1/2	3	5	5	6	8	10	12	14	16
Fig. 114		20	25	30	40	62	125	168	226	342	465	920	1850

* Above torque values are for valves with PTFE seat and disc.

* The torque values specified are based on dry media and are measured at a temperature of 20°C .