


UM-3 Direct Mount Series



Actuator only

Weight: 4.5 kgs

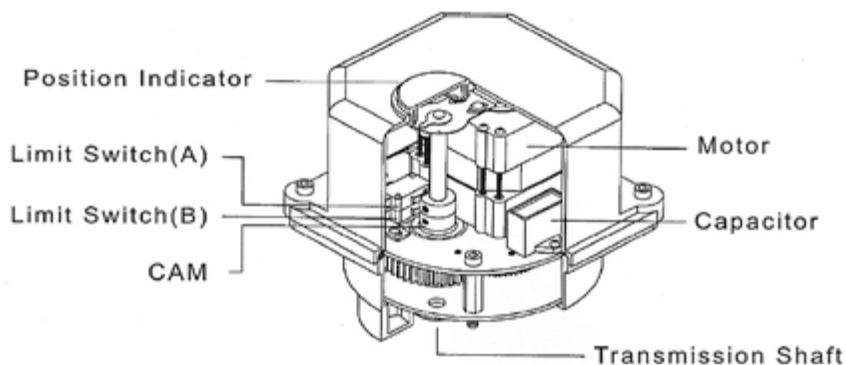



Specification				Speed (sec.)		Output Torque kgf/cm		
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC
25W	0.8A	0.6A	-	1	-	294	350	-
				8		1486	1562	
30W	-	0.3A	-	1	-	-		500
				8				1500

The Size of Valve			
Screwed Ends	Flanged Ends	Butterfly Valve	3-Way Valve
1.1/4" ~ 3"	1.1/4" ~ 3"	2" ~ 5"	2.1/2"

Dimension

Series	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	ISO5211
UM-3	165	172	20	8	203	23.5	70	M8	4	17	45°	148	17.3	68.39	44.2	166	F07

* Action interval: 5 minutes per travel.

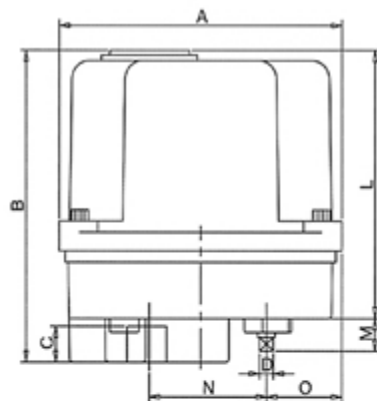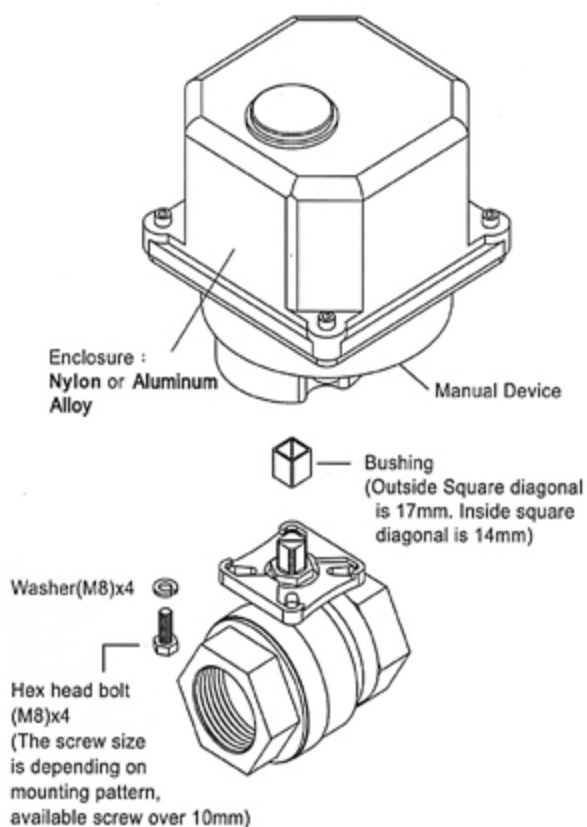

*The UM-3/24VDC is over standard height 26mm.

