




3-WAY INVESTMENT CASTING BALL VALVE L-PORT / T-PORT ISO 9001

MODEL: **BV-3BSL (L-PORT)**
BV-3BST (T-PORT)


- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- Reduce Bore / Locking Device.
- With ISO 5211 Mounting Pad.
- 1000 PSI W.O.G.

Material

Model	BV-3BSL / BV-3BST
1 Body	CF8M
2 Cap	CF8M
3 Seat	PTFE
4 Ball	CF8M
5 Stem	S/S 316
6 End Seals	PTFE
7 Thrust Washer	PTFE
8 Gland	S/S 304
9 Handle	S/S 304
10 Handle Washer	S/S 304
11 Washer	S/S 304
12 Handle Nut	S/S 304
13 Handle Sleeve	VINYL GRIP
14 End Cap	CF8M
15 Stem Packing	PTFE
16 End Seals	PTFE

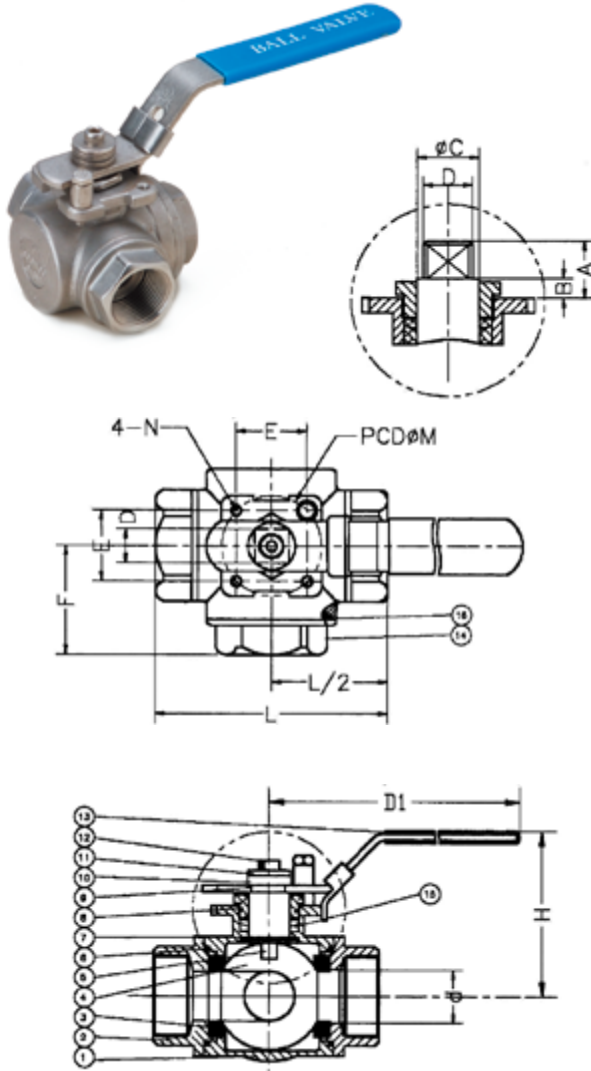

Pressure Temperature Ratings

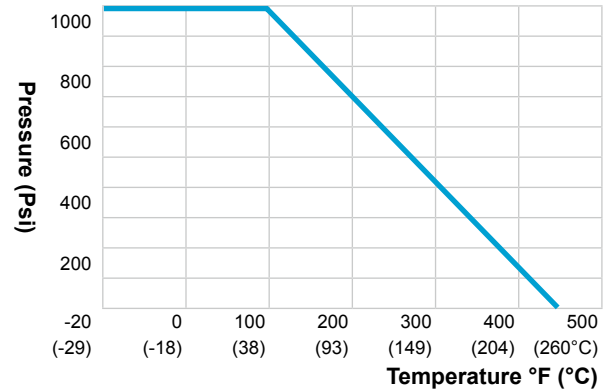

Dimension

Size	inch	mm	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
			8	10	15	20	25	32	40	50
d			11.0	11.0	12.7	16.0	20.0	25.0	32.0	38.1
L			69.4	69.4	75.7	86.6	102.4	118.2	125.8	149
H			62.5	62.5	65.9	84.9	88.7	83.9	103.3	111.5
D1			133.4	133.4	133.4	178.5	178.5	209.9	208	229.9
A			10.7	10.7	10.7	10.9	20	23.4	25.8	25.3
B			5.7	5.7	5.7	3.9	8.5	7.9	10.3	9.8
C			12	12	12	15	15	15	15	18.5
D			9	9	9	11	11	11	11	14
E			30	30	35	35	35	35	49.5	50
F			35.5	35.5	40	42	44	46	57	64
M			42	42	42	50	50	50	70	70
N			M5 x 0.8	M5 x 0.8	M5 x 0.8	M6 x 1	M6 x 1	M6 x 1	M8 x 1.25	M8 x 1.25